



Sensor-based Linked Open Rules


Creator	Amelie Gyrard (Eurecom - Insight - NUIG/DERI) Designed and implemented by Amélie Gyrard, she was a PhD student at Eurecom under the supervision of Prof. Christian Bonnet and Dr. Karima Boudaoud. Currently, LOVIoT is maintained since she is a post-doc researcher at Insight within the IoT unit led by Dr. Martin Serrano and involved in the FIESTA-IoT (Federated Interoperable Semantic IoT/Cloud Testbeds and Applications) H2020 project.
Send Feedback	Do not hesitate to ask for help or give us feedback, advices to improve our tools or documentations, fix bugs and make them more user-friendly and convenient: amelie.gyrard@insight-centre.org
Google Group	https://groups.google.com/d/forum/m3-semantic-web-of-things
Last updated	June 2016 <ul style="list-style-type: none"> • Refactoring code (SLORWS.java, slor.js, renaming files, etc.) • Update the documentations • Explain better the web services + screenshots • Update the Javadoc
Created	June 2016
Status	 Work in progress
Goal	This documentation enables understanding the S-LOR tool: <ul style="list-style-type: none"> • Deduce meaningful knowledge from sensor data • Reasoning engine • Dataset of interoperable rules

Table of contents

I.	S-LOR Citations.....	4
II.	Introduction	5
	1. Reusing domain knowledge from LOV4IoT	5
	2. Sharing and reusing based approach.....	5
	3. Dataset of interoperable rules.....	6
	4. Jena inference engine	7
	5. Algorithm	7
III.	Interpreting IoT data with S-LOR	7
	1. Demo.....	7
IV.	S-LOR Code.....	9

1. WAR/RULES.....	9
V. Code example: Interpreting IoT data and getting M3 suggestions	10
1. Getting a template	10
2. Loading M3 domain knowledge.....	10
3. Executing rules	11
4. Executing SPARQL query	11
5. Finishing the application	12
6. Code summary	12
VI. S-LOR Limitations	12
VII. SLOR Web Services.....	13
1. Getting all rules related to a specific sensor.....	14
2. Getting all projects employing a specific sensor	15
VIII. References	16

Table of figures

FIGURE 1. INTEROPERABILITY ISSUES REGARDING REASONING.....	5
FIGURE 2. RULE EXAMPLE IMPLEMENTED FOR BEING COMPLIANT WITH THE JENA FRAMEWORK	6
FIGURE 3. SPARQL CONSTRUCT RULE EQUIVALENT TO JENA RULES.....	7
FIGURE 4. FINDING RULES TO INTERPRET SENSOR DATA WITH S-LOR	8
FIGURE 5. S-LOR DEMO.....	8
FIGURE 6. JENA RULES FROM THE S-LOR SEMANTIC RULE REPOSITORY.....	9
FIGURE 7. RULE DIRECTORY	10
FIGURE 8. CODE EXAMPLE TO INTERPRET IOT DATA AND GET M3 SUGGESTIONS.....	12
FIGURE 9. SLORWS.JAVA FILE	14
FIGURE 10. WEB SERVICE TO GET RULES FOR A SPECIFIC SENSOR.....	15
FIGURE 11. WEB SERVICE TO GET PROJECT USING A SPECIFIC SENSOR.....	16

Terms and acronyms

IoT	Internet of Things (IoT)
LOV	Linked Open Vocabularies
LOV4IoT	Linked Open Vocabularies for Internet of Things
M3 framework	Machine-to-Machine Measurement (M3) framework
S-LOR	Sensor-based Linked Open Rules

I.

II. S-LOR Citations

Please do not forget to cite our S-LOR work:

- Enrich Machine-to-Machine Data with Semantic Web Technologies for Cross-Domain Applications. IEEE World Forum on Internet of Things (WF-IoT), Seoul, Korea, March 6-8, 2014
Amelie Gyrard, Christian Bonnet and Karima Boudaoud
- Demo paper: Helping IoT application developers with Sensor-based Linked Open Rules
7th International Workshop on Semantic Sensor Networks, in conjunction with the 13th International Semantic Web Conference (ISWC) October 19-23, 2014, Riva del Garda, Trentino Italy. Amelie Gyrard, Christian Bonnet and Karima Boudaoud

III. Introduction

Sensor-based Linked Open Rules (S-LOR) is an approach to share and reuse the rules to interpret IoT data [2]. They provide interoperable datasets of rules compliant with the Jena framework and inference engine.

1. Reusing domain knowledge from LOV4IoT

The rules have been written manually but extracted from the Linked Open Vocabularies for Internet of Things (LOV4IoT) dataset, an ontology/dataset/rule catalogue designed by domain experts in various applicative domains relevant for IoT such as healthcare, agriculture, smart home, smart city, etc.

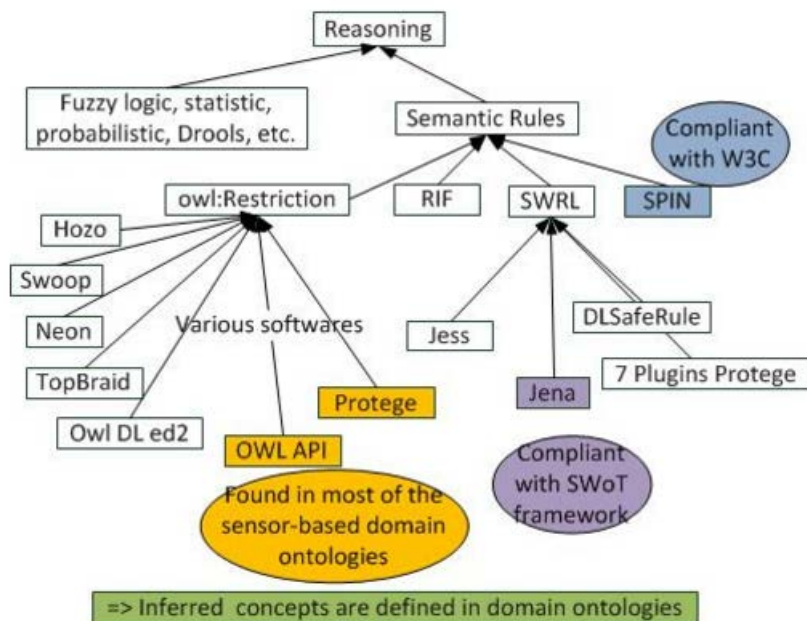


Figure 1 Interoperability issues regarding reasoning

TO DO: Explain owl restrictions, interoperability issues

2. Sharing and reusing based approach

S-LOR has a common vision with the following approaches:

- The **BASIL (Building APIs Simply)**¹ framework combines REST principles and SPARQL endpoints in order to benefit from Web APIs and Linked Data approaches [1]. BASIL reduces the learning curve of data consumers since they query web services exploiting SPARQL

¹ <http://basil.kmi.open.ac.uk/app/>

endpoints. The main benefit is that data consumers do not need to learn the SPARQL language and related semantic web technologies.

- **Linked Edit Rules (LER)**² [3] is a recent approach similar to the Sensor-based Linked Open Rules (S-LOR) to share and reuse the rules associated to the data. This work has been not applied to the context of IoT. LER is more focused on checking consistency of data (e.g., a person's age cannot be negative, a man cannot be pregnant and an underage person cannot process a driving license). LER extends the RDF Data Cube data model by introducing the concept of EditRule. The implementation of LER is based on Stardog's rule reasoning to check obvious consistency.

3. *Dataset of interoperable rules*

Data has been unified thanks to the M3 taxonomy, a cornerstone component for building a dataset of interoperable rules. The picture shows the implementation of the rule based on the M3 taxonomy: the hierarchy of quantity kinds and units.

```
##### CLOUD COVER RULES #####
# Master's thesis: A weather ontology for predictive control in smart homes [Paul Staroch 2013]
# Paper: An Intelligent Knowledge Representation of Smart Home Energy Parameters [Kofler 2011]
# Paper: Thinkhome energy efficiency in future smart homes [Kofler 2011]
# Paper: A semantic representation of energy-related information in future smart homes [Kofler 2011]
# Paper: A knowledge-base for Energy-Efficient Smart Homes [Kofler 2011]
# Rule: IF m3:CloudCover greaterThan 5 AND lessThan 8 m3:Okta THEN MostlyCloudy
[MostlyCloudy:
  (?measurement rdf:type m3:CloudCover)
  (?measurement m3:hasValue ?v)
  greaterThan(?v,5)
  lessThan(?v,8)
  ->
  (?measurement rdf:type weather-dataset:MostlyCloudy)
]
```

Figure 2. Rule example implemented for being compliant with the Jena framework

Since we are using the Jena framework, within this project, intuitively we use the Jena inference engine and Jena rules for the implementation.

After the implementation, we realized that the same rules can be built using the SPARQL query language with the keyword "CONSTRUCT".

Both methods have the same goal updating the knowledge graphs or triplestore with additional information (more triples).

² <http://linkededitrules.org/>

SPARQL construct encourages interoperability since SPARQL is a W3C recommendation.

```
CONSTRUCT {?m naturopathy:hasDisease nat:Flu} WHERE {  
?m rdf:type m3:BodyTemperature.  
?m m3:hasValue ?v.  
FILTER ( ?v > 38 ).  
}
```

Figure 3. SPARQL CONSTRUCT RULE equivalent to Jena rules

4. Jena inference engine

SWRL

Logic-based reasoning

<https://jena.apache.org/documentation/inference/>

5. Algorithm

Algo:

- Input: Dataset semantically annotated according to the FIESTA-IoT ontology including the M3-lite taxonomy
- Output: Dataset updated with more triples, High level abstraction
- Algo:
 - Load the dataset or triplestore
 - Load the rules of subset
 - Execute the reasoning engine
 - Update the dataset or triplestore with more triples

IV. Interpreting IoT data with S-LOR

1. Demo

Go to this web page: http://www.sensormeasurement.appspot.com/?p=swot_template

- ➔ Select a sensor to find all rules interpreting sensor values as depicted in Figure 4 (e.g., Precipitation)

- ➔ The demonstration will show all rules related to the sensor chosen by the user to interpret sensor values.
(e.g., if precipitation = 0 mm/h then NoPrecipitation)
- ➔ You have both the rule for humans and for machines (click on the LinkedOpenRules link)

Sensors used in your application?

Choose a sensor (e.g., accelerometer sensor) **Precipitation Sensor, Pluviometer** **Choose a sensor**

Rules using this sensor (e.g., choose Wind speed sensor):

- Rule: TropicalStormRain, IF m3:Precipitation greaterThan 4mm THEN TropicalStormRain
Project: [Paul Staroch 2013]. See LOV4IoT for more details.
Linked Open Rules URL: <http://sensormeasurement.appspot.com/dataset/transport-dataset>
- Rule: HeavyRain, IF m3:Precipitation greaterThan 20 and lessThan 50 mm/h THEN HeavyRain
Project: [Paul Staroch 2013]. See LOV4IoT for more details.
Linked Open Rules URL: <http://sensormeasurement.appspot.com/RULES/LinkedOpenRulesWeather.txt>
- Rule: MediumRain, IF m3:Precipitation greaterThan 1 and lessThan 4 mm THEN MediumRain
Project: [Paul Staroch 2013]. See LOV4IoT for more details.
Linked Open Rules URL: <http://sensormeasurement.appspot.com/RULES/LinkedOpenRulesWeather.txt>
- Rule: RainySpeedSafetyDevice, IF Rainy THEN hasSensor_Speed = Low_Speed AND hasSafety_Device = (ABS, ESP)
Project: [Ruta et al. 2010]. See LOV4IoT for more details.
Linked Open Rules URL: <http://sensormeasurement.appspot.com/dataset/transport-dataset>
- Rule: **NoPrecipitation**, NoRain, **IF m3:Precipitation = 0 mm** THEN NoPrecipitation **Interpretation of sensor values**
Project: [Kofler et al., ThinkHome, 2011]. See LOV4IoT for more details.
Linked Open Rules URL: <http://sensormeasurement.appspot.com/RULES/LinkedOpenRulesWeather.txt>
- Rule: **HeavyPrecipitation**, IF m3:Precipitation greaterThan 4mm THEN HeavyPrecipitation
Project: [Kofler et al., ThinkHome, 2011]. See LOV4IoT for more details.
Linked Open Rules URL: <http://sensormeasurement.appspot.com/RULES/LinkedOpenRulesWeather.txt> **Implementation of rules**

Figure 4. Finding rules to interpret sensor data with S-LOR

The users can choose a device type from the drop-down list. This drop-down list queries in the backend the M3 ontology (V1) or M3-lite taxonomy (V2).

1) Choose device type

Users Choose a sensor (e.g., precipitation sensor) **Precipitation Sensor, Pluviometer**

2) Automatically built by S-LOR

Rules using this sensor: => used M3-lite taxonomy -> file with Jena rules implemented

- Rule: HeavyPrecipitation, IF m3:Precipitation greaterThan 4mm THEN HeavyPrecipitation
Linked Open Rules URL: <http://sensormeasurement.appspot.com/RULES/LinkedOpenRulesWeather.txt>
- Rule: LightPrecipitation, IF m3:Precipitation greaterThan 0 and lessThan 1mm THEN LightPrecipitation
Linked Open Rules URL: <http://sensormeasurement.appspot.com/RULES/LinkedOpenRulesWeather.txt>
- Rule: SunnyWeatherState, IF HighSolarIrradiance AND NoCloudCover AND NoPrecipitation THEN SunnyWeatherState
- Rule: ModeratePrecipitation, IF m3:Precipitation greaterThan 1 AND lessThan 4mm THEN ModeratePrecipitation
Linked Open Rules URL: <http://sensormeasurement.appspot.com/RULES/LinkedOpenRulesWeather.txt>
- Rule: HeavyRain, IF m3:Precipitation greaterThan 20 and lessThan 50 mm/h THEN HeavyRain
Linked Open Rules URL: <http://sensormeasurement.appspot.com/RULES/LinkedOpenRulesWeather.txt>
- Rule: RainyWeatherState, IF ! NoPrecipitation AND AboveZeroTemperature THEN RainyWeatherState
- Rule: RainySpeedSafetyDevice, IF Rainy THEN hasSensor_Speed = Low_Speed AND hasSafety_Device = (ABS, ESP)
Linked Open Rules URL: <http://sensormeasurement.appspot.com/dataset/transport-dataset>

Figure 5. S-LOR demo

The users can click on the URL to get access to the file with already implemented Jena rules. Figure 13 shows two rules:

- IF precipitation measurement >50 and < 100 mm/h THEN **Extremely Heavy Rain**
- IF precipitation measurement = 0 mm/h THEN **No Precipitation**.


```
← → ↻ sensormeasurement.appspot.com/RULES/LinkedOpenRulesWeather.txt
# Master's thesis: A weather ontology for predictive control in smart homes [Paul Staroch 2013]
# IF Rain greaterThan 50 and lessThan 100 mm/h THEN ExtremelyHeavyRain
[ExtremelyHeavyRain:
  (?measurement rdf:type m3:Precipitation)
  (?measurement m3:hasValue ?v)
  greaterThan(?v,50)
  lessThan(?v,100)
  ->
  (?measurement rdf:type weather-dataset:ExtremelyHeavyRain)
]

# Master's thesis: A weather ontology for predictive control in smart homes [Paul Staroch 2013]
# Paper: An Intelligent Knowledge Representation of Smart Home Energy Parameters [Kofler 2011]
# Paper: Thinkhome energy efficiency in future smart homes [Kofler 2011]
# Paper: A semantic representation of energy-related information in future smart homes [Kofler 2011]
# Paper: A knowledge-base for Energy-Efficient Smart Homes [Kofler 2011]
# IF Precipitation = 0 mm THEN NoPrecipitation
[NoPrecipitation:
  (?measurement rdf:type m3:Precipitation)
  (?measurement m3:hasValue ?v)
  equal(?v,0)
  ->
  (?measurement rdf:type weather-dataset:NoPrecipitation)
]
```

Figure 6. Jena rules from the S-LOR Semantic Rule Repository

V. S-LOR Code

S-LOR is a component of the M3 framework.

M3 on Github: <https://github.com/gyrard/M3Framework>

M3 documentation to set up the code:

<http://sensormeasurement.appspot.com/documentation/M3DeveloperDocumentation.pdf>

1. WAR/RULES

You will find in this directory all the interoperable rules that we designed.

This is the Sensor-based Linked Open Rules (S-LOR) tool. The SWoT generator has predefined-templates to build semantic-based IoT application. The templates will referenced these pre-defined set of rules classified by domains.

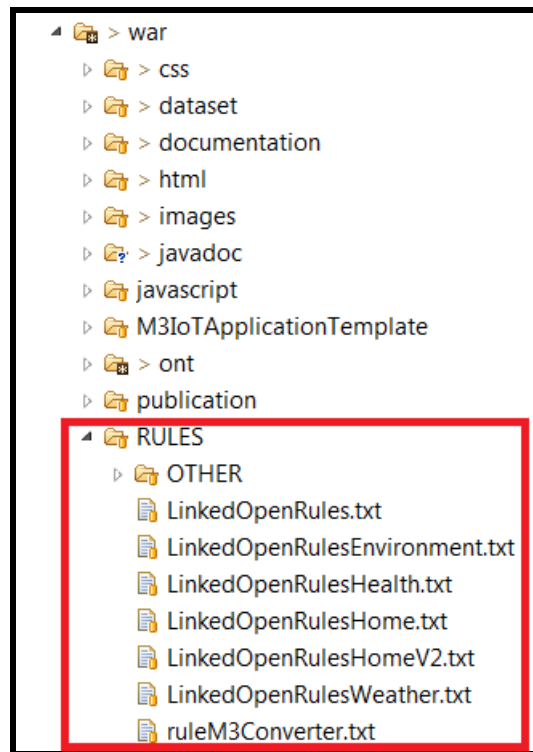


Figure 7. Rule directory

VI. Code example: Interpreting IoT data and getting M3 suggestions

Several steps need to be achieved to interpret IoT data (see Figure 22):

- Loading M3 ontologies, datasets which have been generated in the M3 template.
- Loading M3 data.= which has been generated by the M3 converter.
- Interpreting IoT data using the Jena reasoned
- Executing the M3 SPARQL query which has been generated in the M3 template
- Parse the result and build the user interface , control actuators or send notification, etc.

1. Getting a template

<http://sensormeasurement.appspot.com/?p=m3api>

See documentation (section Tutorial):

<http://sensormeasurement.appspot.com/documentation/M3APIDocumentation.pdf>

2. Loading M3 domain knowledge

Jena tutorial:

http://jena.apache.org/tutorials/rdf_api.html

Code example:

```
// STEP 1: Loading M3 domain knowledge and m3_data
Model model = ModelFactory.createDefaultModel();
InputStream in = new FileInputStream(PATH_FILE + m3_data);
// m3_data has been generated with the M3 converter
model.read( in, fileURL );//read all ontologies generated in the M3 template (.owl)
model.read( in, fileURL );//read all datasets generated in the M3 template (.rdf)
in.close();
```

3. Executing rules

Jena tutorial:

<http://jena.apache.org/documentation/inference/>

Code example:

```
// STEP 2: Interpreting M3 data
Reasoner reasoner = new GenericRuleReasoner(Rule.rulesFromURL(PATH_FILE +
LinkedOpenRules*.txt));
// LinkedOpenRules*.txt: rules generated in the M3 template
reasoner.setDerivationLogging(true);
InfModel infModel = ModelFactory.createInfModel(reasoner, model); //apply the reasoner
// infModel has been updated with high-level abstraction
```

4. Executing SPARQL query

Jena tutorial:

http://jena.apache.org/tutorials/rdf_api.html

Code example:

```
// STEP 3: Getting M3 suggestions

//      Executing the SPARQL query:

Query query = QueryFactory(m3_sparql); // m3_sparql has been generated in the M3 template

ResultSet results = QueryExecutionFactory.create(m3_sparql, model)

String m3_suggestions = ResultSetFormatter.asXMLString(results)
```

5. *Finishing the application*

The main task of the developer is to design a user-friendly interface or control actuators, etc. according to the high-level abstractions deduced by M3 or the M3 suggestions provided by M3.

Code example:

```
// STEP 4: Parsing and displaying m3_suggestions to build the IoT application

// or control actuators, alerting, etc.
```

6. *Code summary*

```
1 // STEP 1: Loading M3 domain knowledge and m3_data
2 Model model = ModelFactory.createDefaultModel();
3 InputStream in = new FileInputStream(PATH_FILE + m3_data);
4 // m3_data has been generated with the M3 converter
5 model.read( in, fileURL );//read all ontologies generated in the M3 template (.owl)
6 model.read( in, fileURL );//read all datasets generated in the M3 template (.rdf)
7 in.close();
8
9 // STEP 2: Interpreting M3 data
10 Reasoner reasoner = new GenericRuleReasoner(Rule.rulesFromURL(PATH_FILE + LinkedOpenRules*.txt));
11 // LinkedOpenRules*.txt: rules generated in the M3 template
12 reasoner.setDerivationLogging(true);
13 InfModel infModel = ModelFactory.createInfModel(reasoner, model); //apply the reasoner
14 // infModel has been updated with high-level abstraction
15
16 // STEP 3: Getting M3 suggestions
17 //      Executing the SPARQL query:
18 Query query = QueryFactory(m3_sparql); // m3_sparql has been generated in the M3 template
19 ResultSet results = QueryExecutionFactory.create(m3_sparql, model)
20 String m3_suggestions = ResultSetFormatter.asXMLString(results)
21
22 // STEP 4: Parsing and displaying m3_suggestions to build the IoT application
23 // or control actuators, alerting, etc.
```

Figure 8. Code example to interpret IoT data and get M3 suggestions

VII. *S-LOR Limitations*

S-LOR has some limitations:

- S-LOR works only with simple sensors such as thermometer, rainfall sensors. Some more complicated sensors such as camera provide images that cannot be processed by S-LOR. For this reasoning, an objective is integrating the KAT toolkit based on machine learning techniques to deal with more complicated sensors.
- How the Semantic Rule repository can be automatically updated with new rules provided by the experimenters (knowledge producers). Adding a new rule in the repository is easy. However, dealing with redundancy and overlapping rules is more complicated. For this, we need to check correctness and completeness of rules. Correctness and completeness have been checked manually.
- Redesign the Jena rules as SPARQL construct since SPARQL construct to encourage interoperability since SPARQL is a W3C recommendation.

TO DO:

Correctness and completeness have been checked manually.

Add table example:

<http://sensormeasurement.appspot.com/documentation/NomenclatureSensorData.pdf>

VIII. SLOR Web Services

To contribute or understand the web services:

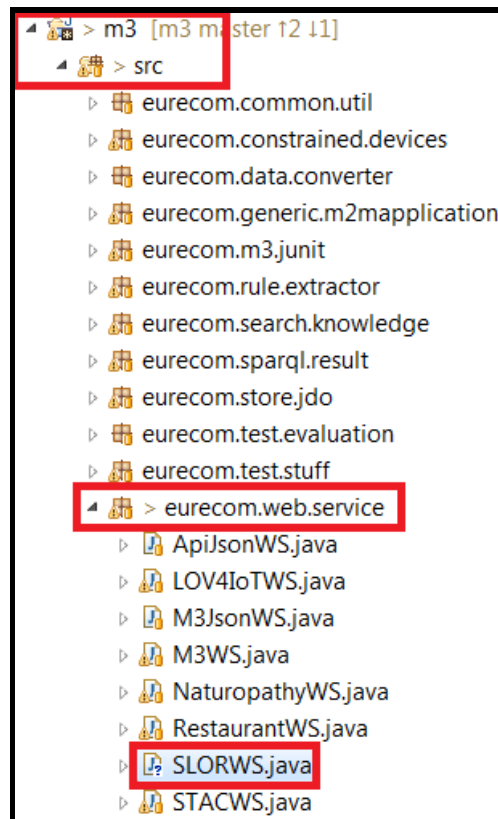


Figure 9. SLORWS.java file

1. Getting all rules related to a specific sensor

Example: <http://sensormeasurement.appspot.com/slur/rule/BodyThermometer>

```
<?xml version="1.0" encoding="UTF-8" ?>
<sparql xmlns="http://www.w3.org/2005/sparql-results#">
  <head>
    <variable name="ruleLabel"/>
    <variable name="ruleComment"/>
    <variable name="m2mappli_label"/>
    <variable name="lorUrl"/>
  </head>
  <results>
    <result>
      <binding name="ruleLabel">
        <literal xml:lang="en">ModerateHypothermia</literal>
      </binding>
      <binding name="ruleComment">
        <literal xml:lang="en">IF m3:BodyTemperature greaterThan 28 m3:DegreeCelsius AND lessThan 32 m3:DegreeCelsius THEN ModerateHypothermia</literal>
      </binding>
      <binding name="lorUrl">
        <uri>
          http://sensormeasurement.appspot.com/RULES/LinkedOpenRulesHealth.txt
        </uri>
      </binding>
    </result>
    <result>
      <binding name="ruleLabel">
        <literal xml:lang="en">NormalFever</literal>
      </binding>
      <binding name="ruleComment">
        <literal xml:lang="en">IF m3:BodyTemperature greaterThan 36 m3:DegreeCelsius AND lessThan 38 m3:DegreeCelsius THEN NormalFever</literal>
      </binding>
      <binding name="lorUrl">
        <uri>
          http://sensormeasurement.appspot.com/RULES/LinkedOpenRulesHealth.txt
        </uri>
      </binding>
    </result>
  </results>
</sparql>
```

Figure 10. Web service to get rules for a specific sensor

2. Getting all projects employing a specific sensor

Example: <http://sensormeasurement.appspot.com/slor/BodyThermometer>

```
<?xml version="1.0" encoding="UTF-8" ?>
<sparql xmlns="http://www.w3.org/2005/sparql-results#">
  <head>
    <variable name="m2mappli"/>
    <variable name="m2mappli_label"/>
    <variable name="m2mappli_comment"/>
    <variable name="m2mdevice"/>
    <variable name="onto"/>
    <variable name="techno"/>
    <variable name="techno_label"/>
    <variable name="techno_comment"/>
    <variable name="securityMechanism"/>
    <variable name="security_mechanism_label"/>
    <variable name="security_mechanism_comment"/>
    <variable name="domain"/>
    <variable name="domain_label"/>
  </head>
  <results>
    <result>
      <binding name="m2mappli">
        <uri>http://sensormeasurement.appspot.com/ont/m3/Ko2006</uri>
      </binding>
      <binding name="m2mappli_label">
        <literal xml:lang="en">[Ko et al. 2006]. See LOV4IoT for more details.</literal>
      </binding>
      <binding name="m2mappli_comment">
        <literal xml:lang="en">
          Paper: Ontology-based context-aware service engine for U-Healthcare
        </literal>
      </binding>
      <binding name="m2mdevice">
        <uri>
          http://sensormeasurement.appspot.com/m3#BodyThermometer
        </uri>
      </binding>
      <binding name="domain">
        <uri>http://sensormeasurement.appspot.com/m3#Health</uri>
      </binding>
      <binding name="domain_label">
        <literal xml:lang="en">Healthcare</literal>
      </binding>
    </result>
  </results>
</sparql>
```

Figure 11. Web service to get project using a specific sensor

IX. References

- [1] Enrico Daga, Luca Panziera, and Carlos Pedrinaci. A basilar approach for building web apis on top of sparql endpoints. 2015.
- [2] Amelie Gyrard, Christian Bonnet, and Karima Boudaoud. Helping IoT application developers with sensor-based linked open rules. In *SSN 2014, 7th International Workshop on Semantic Sensor Networks in conjunction with the 13th International Semantic Web Conference (ISWC 2014)*, 19-23 October 2014, Riva Del Garda, Italy, 10 2014.
- [3] Albert Merono-Penuela, Christophe Gueret, and Stefan Schlobach. Linked edit rules: A web friendly way of checking quality of rdf data cubes. In *3rd International Workshop on Semantic Statistics co-located with 14th International Semantic Web Conference (ISWC 2015)*, 2015.